

# Variability in spectral backscatter estimated from satellites and its relation to *in situ* measurements in optically complex coastal waters

MARK A. MOLINE\*†, ROBERT ARNONE‡, TRISHA BERGMANN§, SCOTT GLENN§, MATTHEW J. OLIVER†, CRISTINA ORRICO†, OSCAR SCHOFIELD§ and SASHA TOZZI§

†Biological Sciences Department, California Polytechnic State University, San Luis Obispo, CA 93407, USA

‡Naval Research Laboratory, Stennis Space Center, MS 39529, USA

§Institute of Marine and Coastal Sciences, Rutgers University, New Brunswick, NJ 08901, USA

**Abstract.** A large database of *in situ* bio-optical measurements was collected at the Long-term Ecosystem Observatory off the southern coast of New Jersey, USA. In part, the research effort focused on reconciling *in situ* estimates with satellite-derived estimates of the inherent optical properties (IOP). At 442 nm, *in situ* absorption values ranged from less than 0.2 to over 1.5 inverse metres. Satellite estimates of backscatter ranged from 0.002 to 0.03 inverse metres at 442 nm and showed significant variability in time and space during July 1999, reflecting the recurrent high frequency events that characterize the region—wind-mixing, storms and coastal upwelling. Despite this variability, there was good qualitative agreement between the satellite derived IOP estimates and *in situ* IOP measurements. Both absorption and backscatter values increased near-shore, reflecting enhanced concentrations of phytoplankton, sediments and dissolved organic matter.

## 1. Introduction

As part of the Hyperspectral Coastal Ocean Dynamics Experiments (HYCODE), this study had two main objectives: (1) to compare *in situ* spectral backscatter data with estimated backscatter derived from the Sea viewing Wide Field of view Sensor (SeaWiFS); and (2) to compare *in situ* spectral scattering data with that modelled from an *in situ* absorption/attenuation (WetLabs AC-9).

*In situ* measurements were collected at the Long-term Ecosystem Observatory (LEO-15) off the southern coast of New Jersey, USA using the Hobilabs HydroScat-6 spectral backscatterer. Four of the six wavelengths measured by the HydroScat-6 are used in this analysis; 442 nm, 488 nm, 589 nm and 620 nm, all measured at a 140° angle. For proper comparison of derived scattering and *in situ* scattering, a profiling Satlantic spectral radiometer was used to calculate the first

optical depth. In addition, a WetLabs absorption/attenuation meter (AC-9) was used to quantify the spectral absorption and attenuation through the water column. AC-9 data were used to initialize the radiative transfer model Hydrolight v5.0 to model spectral backscatter. All of these instruments were on the same profiling cage within 20 cm of each other. Transect lines for three days highlighted in this study are given in figure 1.

## 2. Method

Spectral backscatter data from the HS-6 was first binned to 0.5m depth intervals to eliminate bias due to uneven depth profiling. For comparison to satellite-derived backscatter, the *in situ* backscatter data were averaged within the first optical depth, which contributes approximately 90% of the in-water reflectance. Depth-dependent AC-9 data were used for input in the Hydrolight v5.0 model and with backscatter as the output for every 0.5 m of the water column. The binned HS-6 data were compared to the Hydrolight backscatter at 0.5 m intervals.

SeaWiFS ocean colour imagery was processed into optical products of spectral absorption and backscattering at all wavelengths (Arnone and Gould 1998) using a modified version of the SeaWiFS Data Analysis System (SEADAS). SeaWiFS image processing was optimized for coastal water using the near-infrared (NIR) atmospheric correction (Arnone *et al.* 1998). This procedure uses an iterative procedure for coupled in-water and atmospheric models to determine the water-leaving radiance in coastal waters. Coastal waters can have significant reflectance in the 765 nm and 865 nm channels of SeaWiFS. The iterative procedure accounts for the water portion of these channels, which are used with atmospheric correction. Accurate reflectance measurements in coastal waters are required for accurate derived optical properties.

These SeaWiFS reflectance measurements are used with two semi-empirical

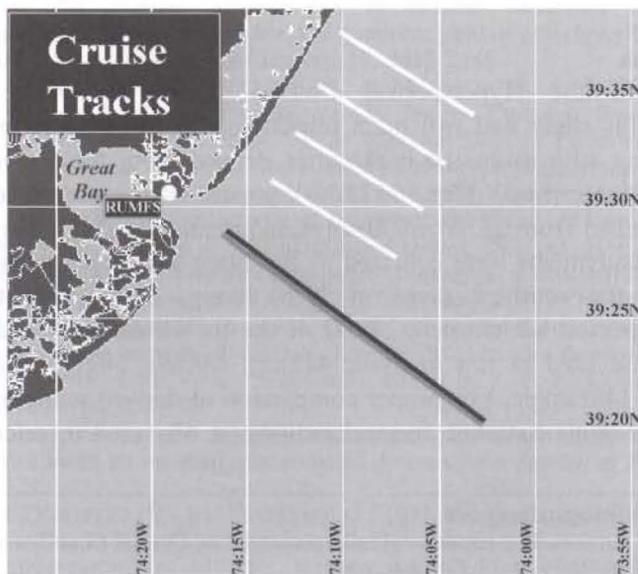


Figure 1. Cruise tracks for three days during July 1999, off the coast of New Jersey in relation to the Rutgers University Marine Field Station. Black line, 7 July; white lines, 16 July; grey line, 30 July.

in-water algorithms to uncouple the surface water backscatter and absorption properties. These algorithms are based on a reflectance value of ca. 0.33 multiplied by the ratio of backscatter to absorption at a specific wavelength. The modified algorithm determines backscatter at 670 nm using the reflectance relationship at 670 nm by assuming a known absorption at 670 nm. Then, using Gould and Arnone (1999), the backscatter is estimated at all wavelengths.

The Carder *et al.* (1999a, b) algorithm was also used to estimate spectral backscatter. Here the 550 nm channel is used. This algorithm portioned the total spectral absorption into the absorption from chlorophyll and absorption from dissolved organics and particles. These components were combined with water absorption to estimate the total absorption at each wavelength (Arnone and Gould 1998). The reflectance ratio is then used to convert to spectral backscatter.

SeaWiFS optical properties were compared with *in situ* optical properties measured using an absorption scattering instrument. The spectral backscatter estimated from SeaWiFS was converted to total scattering using a Petzold volume scattering function (Petzold 1972, Gould *et al.* 1999). There are limitations with the Petzold conversion, but this study is data limited in coastal waters.

### 3. Results

There was generally good agreement between wavelength-specific measured *in situ* backscatter and the SeaWiFS derived estimates for both algorithms (table 1). This relationship was robust across several days and stations (figure 2). The SeaWiFS algorithms, however, tended to cluster offshore and inshore waters separately (data not shown), suggesting additional complexity across optical fronts, which characterize the study region. Modelled *in situ* backscatter derived from the AC-9 also correlated well with measured values at depth; however, this coherence generally broke down in surface waters, illustrating the importance of collecting good surface measurements with the AC-9 in remote sensing applications.

Table 1. Correlation coefficients ( $R^2$ ) for measured *in situ* backscatter and those derived from SeaWiFS.

	(nm)	SeaWiFS algorithm (Arnone <i>et al.</i> 1998)				SeaWiFS algorithm (Carder <i>et al.</i> 1999a, b)			
		443	490	555	670	443	490	555	670
Measured 7 July ( $n=6$ )	442	0.63	–	–	–	0.90	–	–	–
	488	–	0.55	–	–	–	0.85	–	–
	589	–	–	0.68	–	–	–	0.96	–
	602	–	–	–	0.70	–	–	–	0.96
Measured 16 July ( $n=12$ )	442	0.57	–	–	–	0.57	–	–	–
	488	–	0.64	–	–	–	0.63	–	–
	589	–	–	0.67	–	–	–	0.69	–
	602	–	–	–	0.69	–	–	–	0.74
Measured 30 July ( $n=8$ )	442	0.65	–	–	–	0.65	–	–	–
	488	–	0.62	–	–	–	0.72	–	–
	589	–	–	0.35	–	–	–	0.46	–
	602	–	–	–	0.69	–	–	–	0.76

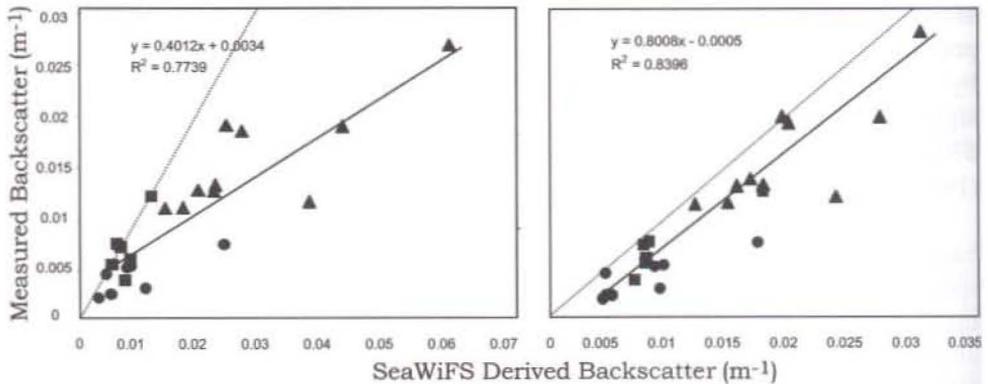


Figure 2. Comparison of optical backscatter derived from SeaWiFS (490 nm) with that measured *in situ* (448 nm). Dotted line shows the 1:1 relationship. Squares, 7 July; triangles, 16 July; circles, 30 July.

### Acknowledgments

We wish to thank Taylor Newton, Erica Peters, Dwight Peterson, the Rutgers Marine Field Station staff and *R/V Walford* crew for their assistance in collection of data. This study was funded through grants to MAM from NASA (NAG5-8674) and the Office of Naval Research (N00014-99-1-0197).

### References

- ARNONE, R. A., and GOULD, R. W., 1998, Coastal Monitoring Using Ocean Color. *Sea Technology*, **39**, 18–27.
- ARNONE, R. A., MARTINOLICH, P., GOULD, R. W. JR., STUMPF, R., and LADNER, S., 1998, Coastal optical properties using SeaWiFS. In *Ocean Optics XIV*, edited by S. Ackleson (Bellingham, WA: SPIE), pp. 304–312.
- CARDER, K. L., CHEN, F. R., LEE, Z., and HAWES, S., 1999a, *MODIS ATBD-19 v.5* (Washington D.C.: NASA).
- CARDER, K. L., CHEN, F. R., LEE, Z. P., HAWES, S. K., and KAMYKOWSKI, D., 1999b, Semianalytic Moderate-Resolution Imaging Spectrometer algorithms for chlorophyll a and absorption with bio-optical domains based on nitrate-depletion temperatures. *Journal of Geophysical Research*, **104**, 5403–5421.
- GOULD, R. W., ARNONE, R. A., and MARTINOLICH, P. M., 1999, Spectral dependence of the scattering coefficient in case 1 and case 2 waters. *Applied Optics*, **38**, 2377–2383.
- PETZOLD, T. J., 1972, *Volume scattering functions for selected ocean waters*. No. Refs. 72–78 (Scripps Institute of Oceanography).