

# **Algae grown on dairy and municipal wastewater for simultaneous nutrient removal and lipid production for biofuel feedstock**

I. Woertz<sup>1</sup>, A. Feffer<sup>2</sup>, T. Lundquist<sup>3</sup>, Y. Nelson<sup>4</sup>

Civil and Environmental Engineering Department, California Polytechnic State University,  
San Luis Obispo, CA 93407

## **Abstract**

Algae grown on wastewater media are a potential source of low-cost lipids for production of liquid biofuels. This study investigated lipid productivity and nutrient removal by green algae grown during treatment of dairy farm and municipal wastewaters supplemented with CO<sub>2</sub>. Dairy wastewater was treated outdoors in bench-scale batch cultures. The lipid content of the volatile solids peaked at Day 6, during exponential growth, and declined thereafter. Peak lipid content ranged from 14-29%, depending on wastewater concentration. Maximum lipid productivity also peaked at Day 6 of batch growth, with a volumetric productivity of 17 mg/day/L of reactor and an areal productivity of 2.8 g/m<sup>2</sup>/day, which would be equivalent to 11,000 L/ha/yr (1,200 gallons/acre/year) if sustained year-round. After 12 days, ammonium and orthophosphate removals were 96% and >99%, respectively. Municipal wastewater was treated in semi-continuous indoor cultures with 2-4 day hydraulic residence times (HRTs). Maximum lipid productivity for the municipal wastewater was 24 mg/day/L, observed in the 3-day HRT cultures. Over 99% removal of ammonium and orthophosphate was achieved. The results from both types of wastewater suggest that CO<sub>2</sub>-supplemented algae cultures can simultaneously remove dissolved nitrogen and phosphorus to low levels while generating a feedstock potentially useful for liquid biofuels production.

*Keywords:* Biofuels, biodiesel, algae, lipids, algal polycultures, wastewater treatment, dairy waste, municipal, nutrient removal, carbon dioxide

1. Currently Research Engineer, Civil and Environmental Engineering Department, California Polytechnic State University, 1 Grand Ave., San Luis Obispo, CA 93407
2. Currently Project Coordinator, LifeWater International, Inc. 3563 Empleo St., Suite C, San Luis Obispo, CA 93401
3. Assistant Professor, Civil and Environmental Engineering Department, California Polytechnic State University, 1 Grand Ave., San Luis Obispo, CA 93407
4. Professor, Civil and Environmental Engineering Department, California Polytechnic State University, 1 Grand Ave., San Luis Obispo, CA 93407

## Introduction

Biofuels produced from plants have the potential to replace a significant fraction of our fossil fuel needs with a renewable alternative (Perlack et al. 2005). However, concern has grown that the use of food crops for production of ethanol, biodiesel or other renewable fuels will increase food prices while having little impact on greenhouse gas emissions (Fargione et al. 2008). Prior work, in particular the Aquatic Species Program sponsored by the US Department of Energy, suggested that algae are capable of producing oil suitable for conversion to biodiesel with an areal productivity 20-40 times that of oilseed crops, such as soy and canola (Sheehan et al. 1998). However, an economic study of such processes (Benemann and Oswald 1996) suggested that large-scale algae cultivation solely for biofuel production was not economical, and the authors re-emphasized the integration of biofuels production and wastewater treatment with CO<sub>2</sub> supplementation, as first suggested by Oswald and Golueke (1960). In particular, assimilation of wastewater nutrients by algae followed by algae harvesting via sedimentation were considered potentially practical and economical approaches to biofuel production.

Use of algae for municipal wastewater treatment in ponds is well established (Oswald et al. 1953, Oswald 2003), and algae-based treatment of dairy and piggery waste also has been investigated (e.g., Craggs et al. 2004, Kebede-Westhead et al. 2006, Mulbry et al. 2008, An et al. 2003). Algae growth in wastewater treatment ponds contributes to treatment mainly through dissolved oxygen production and nutrient assimilation. However, the carbon:nitrogen and carbon:phosphorus ratios in domestic sewage (C:N 3.5:1; C:P 20:1) and dairy lagoon water (C:N 3:1; C:P 10:1) are low compared to typical ratios in rapidly-growing algae

biomass (C:N 6:1; C:P 48:1) (Metcalf and Eddy 2006, USDA 1992, Oswald 1960). This dearth of carbon leads to limitations in algae production and incomplete assimilation of wastewater nutrients by algae. The experiments described in the present research overcame the carbon limitation of the wastewaters by addition of CO<sub>2</sub> to the cultures. The effects of this addition on both algae growth and nutrient assimilation were measured. In future applications, CO<sub>2</sub> could be supplied by the flue gas from power plants and other sources. A schematic of one envisioned process is shown in Figure 1.

CO<sub>2</sub> supplementation of algae cultures to increase productivity has been studied for many years (Burlew 1953), as has the use of flue gas as a CO<sub>2</sub> source for algae culture (Straka et al. 2000). CO<sub>2</sub> supplementation to promote nutrient removal has also been studied briefly in outdoor ponds (Benemann et al. 1980). However, the production of lipids was not measured in these studies.

Lipid content for pure cultures of algae have been reported to range from 1%-85%, and the lipids exhibit varying carbon chain lengths, degrees of unsaturation, and polarity (e.g., reviews in Chisti 2007, Metting 1996, and Enssani 1987). However, the lipid content and, more importantly, the lipid productivity of polycultures of algae, such as wastewater pond algae, have seldom, if ever, been reported. Further, lipid content, fatty acid profile, and biomass productivity depend on environmental conditions, culturing methods, and growth phase (Thompson 1996, Tsuzuki et al. 1990). In particular, nitrogen limitation increases lipid content in some species (Spoehr and Milner 1949, Leman 1997). However, nitrogen limitation decreases growth rate, which can lead to decreased overall lipid productivity

(Shiffrin and Chisolm 1981). Benemann and Tillett (1987) investigated this problem, but maximizing lipid productivity remains an outstanding problem.

While a few studies have reported the lipid *content* of waste-grown algae cultures (e.g., 25%, Enssani 1987), lipid *productivities* for waste-grown polycultures apparently have not been reported previously. The research presented herein was conducted to determine the lipid content and lipid productivity of microalgae grown for nutrient removal from two types of wastewater—dairy and municipal.

## **Methods**

### *Overview of Experiments*

Two sets of experiments were run in parallel to determine algae growth, nutrient removal, and lipid productivity in municipal wastewater and dairy wastewater. The municipal wastewater experiment monitored algae growth under semi-continuous operation for 18 days to study the effects of CO<sub>2</sub> levels and hydraulic residence times on algae growth and nutrient removal.

Control cultures with addition of air only (no CO<sub>2</sub>) were used to simulate the carbon-limitation typical of wastewater ponds and to differentiate the effect of CO<sub>2</sub> addition on productivity. In the dairy wastewater experiment, lipid productivity and nutrient removal were monitored during 15 days of batch growth to study the effect of the growth cycle on lipid content.

### *Collection and pretreatment of wastewater*

For the municipal wastewater experiments, 60 L of primary clarifier effluent was collected at the San Luis Obispo, California, municipal wastewater treatment facility. The wastewater was mixed thoroughly and passed through screens with 196- $\mu\text{m}$  openings (commercial house paint filters). The screened wastewater was stored in 4-L HDPE containers at  $-10^{\circ}\text{C}$ .

For the dairy wastewater experiments, free-stall barn flush water was collected from a storage pond at the 400-head Cal Poly Dairy in San Luis Obispo. In flush operations at this dairy, the flush water is passed through a bar screen and sand trap and then collected in a covered sump. The wastewater is then pumped over a wedge-wire inclined screen, which removes feed and other fine solids, before being discharged to the 0.5-ha storage pond. Wastewater for the research was collected from the storage pond and then treated in an anaerobic digester before being used in algae growth experiments. The 130-L digester was unheated, unmixed and fed semi-continuously to achieve a 6-week hydraulic residence time.

### *Municipal wastewater experimental procedures*

Eight 1-L Pyrex Roux bottles (Fisher Scientific) were used as algae growth reactors for the municipal wastewater experiments. Each bottle was placed vertically on a magnetic stirrer and mixed by a PTFE-coated 2.5-cm magnetic stir bar spinning at approximately 300 rpm. The bottles were illuminated from two sides by a total of four 40-W full-spectrum fluorescent bulbs (Durotest Vitalite<sup>®</sup>) operated on a 16 hr:8 hr light:dark cycle. When on, the bulbs provided an average illuminance that totaled 4300 lux at the two faces of each bottle (Lutron

LX-101 meter), which is equivalent to about  $12 \text{ W/m}^2$  of photosynthetically active radiation (Li-Cor, 2008).

To provide gas exchange, each bottle was sparged with either air or a  $\text{CO}_2$ -air mixture through a cylindrical polypropylene diffuser 36-mm long and 9-mm in diameter. Gas was delivered to the diffusers through a manifold of 4-mm ID clear vinyl tubing with manual flow control valves. For bottles sparged with air- $\text{CO}_2$  mixtures, gases were mixed by a Matheson Model 665 gas mixer that was connected to a 50-lb tank of 99.97%  $\text{CO}_2$  and a Maxima Model A-805 2.5-psi aquarium air pump. The  $\text{CO}_2$  concentration in the blend was set to maintain pH between 7.0 and 8.0. For the Roux bottles that were sparged with air alone, the 4-mm tubing was connected to a 3-W aquarium air pump (Profile 1500).

The culture volume in each Roux bottle was 800 mL. Wastewater was introduced into the bottles with a daily draw-fill procedure at the end of the light period. Three daily hydraulic loading rates were tested—200 mL, 267 mL, and 400 mL of primary effluent—in order to achieve four-, three-, and two-day hydraulic residence times (HRTs), respectively. For the air- $\text{CO}_2$  sparged treatments, each HRT was run in duplicate. For the air-only treatment, the 3-day HRT was run in duplicate. Culture media temperature ranged from  $23^\circ\text{C}$  to  $25^\circ\text{C}$  and did not vary between the bottles more than  $1.5^\circ\text{C}$ .

#### *Dairy wastewater experimental procedures*

For the dairy wastewater, algae were cultured outdoors in six 40-L rectangular glass aquarium tanks (Figure 2). The tanks were filled with 20 L of effluent from the anaerobic digester. To

better simulate light conditions in ponds, sunlight was allowed to enter the tanks only through the top water surface by masking the tank walls up to the waterline with black tape. A Plexiglas<sup>®</sup> cover excluded rainfall, but a gap was provided between the cover and the tanks for ventilation.

In preliminary experiments with undiluted dairy wastewater algal growth was poor, presumably due to the high opacity of the wastewater. Therefore, the subsequent experiments reported here, used 10% and 25% wastewater diluted with tap water. Each experimental treatment was run in triplicate with air-sparging at 1.5 L/min for mixing, and separate, simultaneous CO<sub>2</sub> sparging at approximately 0.015 L/min, which controlled culture pH.

The experiment was run during March 2007 when the average daily solar radiation was 203 W/m<sup>2</sup> (California Irrigation Management Information System Station #52). The average water temperature, measured daily at 3:00 PM, was 30.6°C. Water samples were collected between 3:00 and 3:30 PM.

### *Inoculation*

Algae inoculum was collected from local ponds treating municipal or winery wastewater and from a creek. The inoculum samples contained a wide-ranging mixture of green algae and diatoms, which were identified by cell morphology using phase-contrast microscopy with reference to Prescott et al. (1978). Prominent genera included *Actinastrum*, *Scenedesmus*, *Chlorella*, *Spirogyra*, *Nitzschia*, *Micractinium*, *Golenkinia*, *Chlorococcum*, *Closterium*, *Euglena*, and two unidentified species. The municipal culture inoculum contained 625 mg/L

volatile suspended solids (VSS) and was added to the wastewater media in a 2% (v/v) ratio. For the dairy cultures, the inoculum concentration was 500 mg/L VSS, added at a 10% (v/v) ratio.

#### *Water Quality Analyses and Lipid Extraction*

VSS concentrations were determined gravimetrically according Standard Methods (APHA, 2005). Temperature and pH were monitored to characterize growth conditions. Nutrient removal was evaluated by analyzing for nitrite, nitrate, and orthophosphate using a Dionex DX 120 ion chromatograph with an AG9-HC IonPac<sup>®</sup> Guard Column, AS9-HC 4-mm IonPac<sup>®</sup> IC column, DS4-1 Detection Stabilizer and an AS40 Automated Sampler. Total ammonia nitrogen ( $\text{NH}_3 + \text{NH}_4^+ - \text{N}$ ) concentrations were determined using the Ammonia-Selective Electrode Method (APHA 4500-NH<sub>3</sub> D). Organic nitrogen was determined using the Macro-Kjeldahl method (APHA Method 4500-N<sub>org</sub>).

To complete a nitrogen balance for the Roux bottle experiments, it was necessary to quantify the volatilization of ammonia. This quantity was determined by passing the sparged gas through a boric acid solution. This procedure was conducted for one Roux bottle of each duplicate. A two-hole stopper with 4-mm tubing allowed sparging gas in and directed sparged gas out and into the boric acid solution through a polypropylene diffuser. The diffuser was submersed 12 cm in a graduated cylinder under 100-200 mL of boric acid indicating solution (APHA 4500-NH<sub>3</sub> C. 3.b.). At the end of a mass balance period, DI water was added to the graduated cylinder to compensate for evaporation. This solution was then

titrated back to its original pH, and its ammonia concentration was calculated according to APHA 4500-NH<sub>3</sub> C.

The lipid content of the VSS was analyzed gravimetrically by a procedure adapted from Bligh and Dyer (1959) by Benemann and Tillett (1987). The method consisted of solvent-based extraction to isolate both polar and nonpolar lipids from cell biomass and water. The VSS of each sample was measured to determine the concentration of algal biomass in the wastewater effluent. A 200-mL aliquot of the same sample was centrifuged in a PTFE tube to form an algae pellet for lipid extraction. After decanting, the pellet was re-suspended in 4 mL of DI water and frozen until extraction. For extraction, the samples were thawed, and 5 mL of chloroform and 10 mL of methanol were added. The samples were then sonicated continuously in the centrifuge tube for 1 min. (Branson Sonifier 250 with a Model #102 tip). The samples were then placed on a shaker table overnight. The next day an additional 5 mL of chloroform and 5 mL of DI water were added to make the final ratio of chloroform:methanol:water 10:10:9. The samples were then vortexed for 30 sec. After the samples had been homogenized, they were centrifuged at 7000 rpm for 4 min. The lipids were soluble in the chloroform, which formed a dense layer at the bottom of the centrifuge tube. The remaining cell debris created a middle layer, while the methanol and water created a top layer. The lipid-chloroform layer was removed with a pipette and filtered through a 0.2- $\mu$ m nylon syringe filter. The filtrate was deposited into a tared aluminum tray. The tray was then placed into a desiccator flushed with nitrogen to allow the chloroform to evaporate. A second extraction was performed by adding an additional 10 mL of chloroform to the centrifuge tube, and the mixture was again vortexed and centrifuged. This second extraction

was placed into a separate tared tray and evaporated under nitrogen. The trays were then dried at 105°C for one hr. After cooling in a desiccator, the trays were weighed to the nearest 0.01 mg. Adding the weights of the two extractions from each sample gave the total lipid weight.

## **Results and Discussion**

### *Influent wastewater characteristics*

The municipal primary wastewater characteristics, as well as the initial conditions in the dairy wastewater bioreactors immediately after inoculation are reported in Table 1. After dilution, the 25% dairy wastewater had ammonium and orthophosphate concentrations similar to the undiluted municipal wastewater.

### *Culture conditions*

The laboratory municipal wastewater cultures were grown under steady conditions as described in the Methods section. However, the outdoor dairy wastewater cultures experienced widely varying conditions both daily and over the course of the experiments (Table 2). The average 24-hr insolation ranged from 50-252 W/m<sup>2</sup>. Due to manual adjustment of CO<sub>2</sub> flow, pH ranged from 6.5-8.9. The water temperatures in all the tanks were similar and reached as high as 37°C (Table 2).

### *Algal and lipid productivity*

The semi-continuous-flow experiments with municipal wastewater reached nearly steady-state biomass concentrations after 11 days of operation, although VSS was higher on the 18<sup>th</sup> day, when lipid samples were taken (Figure 3). For the 3-d HRT cultures, sparging with CO<sub>2</sub> more than doubled the VSS concentration compared to sparging with air. For the treatments with CO<sub>2</sub> sparging, biomass production was similar for the 3- and 4-day HRTs, with steady-state VSS concentrations of 700-800 mg/L. In contrast, the steady-state VSS concentration for the CO<sub>2</sub>-sparged 2-d HRT treatment was only 300 mg/L. The municipal wastewater cultures were dominated by algae in the *Chlorella*, *Micractinium*, and *Actinastrum* genera.

The lipid contents of the algae from the municipal wastewater experiments ranged from 4.9-11.3% of VSS by weight (Table 3). Despite the relatively low lipid contents observed, short residence times and high biomass production rates resulted in lipid productivities ranging from 9.7 mg/L/day (air-sparged) to 24 mg/L/day (CO<sub>2</sub>-sparged, 3-d HRT).

Lipid production using dairy wastewater was measured in batch experiments with two different dilutions of wastewater (10% and 25%). Biomass concentrations increased to maximum values of 500 mg /L VSS at Day 6 for the 10% dilution (Figure 4) and 900 mg /L VSS at Day 13 for the 25% dilution (Figure 5). The higher biomass production for the 25% dilution was likely due to the higher nutrient concentrations (Table 1). The dairy wastewater cultures were dominated by *Scenedesmus*, followed by *Micractinium*, *Chlorella*, and *Actinastrum*. These were the same genera that dominated in the municipal wastewater cultures, except that *Scenedesmus* was absent in the municipal cultures.

For both dairy wastewater dilutions, the highest lipid content was observed during the exponential growth phase, and it declined thereafter (Figures 4 and 5). The total lipid content of biomass from the 10% dilution ranged from 8-14%, and that of the 25% dilution ranged from 10-29% by weight. In comparison, total lipid content of pure *Scenedesmus* and *Chlorella* cultures has been reported to range from 12-45% (Thompson 1996).

For the dairy wastewater experiments, the maximum lipid production rate was 17 mg/L/day on a volumetric basis or 2.8 g/m<sup>2</sup>/day on an area basis, achieved by Day 6 for the 25% dilution. In comparison, previous research with open-surface systems growing pure cultures have shown somewhat higher production rates ranging from 4-7.9 g/m<sup>2</sup>/day (Table 4; Laws 1984, Thomas 1984, and Brown 1990).

In both the batch and semi-continuous experiments, peak lipid content was associated with high biomass growth rates. For the dairy wastewater experiments, the highest lipid content and productivity was achieved during exponential growth for both the 10% and 25% dilution experiments, rather than during later phases when nutrient concentrations were low (Figures 4, 5 and 7). For the indoor municipal wastewater experiment, the highest lipid content (11%) was observed at the shortest HRT (2-day). In these semi-continuous-flow experiments, the shorter retention time corresponded to more rapid biomass growth and greater lipid productivity. Thus high lipid production was associated with rapid growth for both batch dairy and semi-continuous municipal wastewater experiments. Roessler (1990) has discussed similar results of increased lipid content in the exponential growth phase of microalgae and

theorized that at lower biomass concentrations with less self-shading, algae biosynthesize lipid storage products as a means of capturing excess light energy. In contrast, others have found higher lipid content in cultures that were nutrient limited (Leman 1997, Spoehr and Milner 1949).

The maximum observed lipid productivity of the dairy waste reactors ( $2.8 \text{ g/m}^2/\text{day}$ ) corresponds to about 11,000 L/ha/yr (1,200 gallons/acre/year). Without improvements, productivity in full-scale high-rate algae ponds is expected to be lower due to factors such as winter insolation and temperature, predation, maintenance downtime, and shifts in algal strains. For example, assuming 300 days/yr of operation, the productivity would be reduced to 9,000 L/ha/yr (960 gallons/acre/year). An additional uncertainty in scale-up estimates stems from the difference in operational modes for the dairy wastewater experiments (batch) and typical high-rate pond wastewater treatment (continuous). Theoretically, the maximum growth rate achieved in batch culture could also be achieved in continuous flow culture (Gualtieri and Barsanti 2005). Of course, the actual productivity for a full-scale system will depend on local environmental conditions, cultivation parameters, dominant algal strains, etc. Furthermore, the suitability of the algal lipids for fuel production will depend on the lipid characteristics (e.g., polarity, saturation level, and chain length) and the ease of extraction.

Much higher algal lipid productivities have been envisioned (e.g., 42,600-136,900 L/ha/yr, Chisti 2007) than observed in this study. However, even this study's oil production estimate of 9,000 L/ha/yr is 18-times greater than the 490 L/ha/yr reported for soybean oil production (USDA 2005).

### *Nutrient removal*

For the municipal wastewater, over 99% ammonium and orthophosphate removal was achieved for CO<sub>2</sub>-sparged treatments with both 3- and 4-d HRT (Table 5). To determine the fate of the removed ammonium and to validate the results, a nitrogen balance was calculated on four occasions over ten days of operation. The results were similar on all four days, and Figure 6 shows the balance for Day 18. The average recovery achieved was 96% with a standard deviation of 8.7%. Ammonium was the main form of nitrogen in the influent wastewater, and after algal growth, organic nitrogen was predominant (Figure 6). Ammonia volatilization was minor, the greatest amount being <1 mg/bottle/day from the air-sparged treatment, which accounts for <7% of the influent total nitrogen. Since this treatment developed the highest pH (10.3) due to lack of CO<sub>2</sub> sparging, it was the most prone to ammonia volatilization. The nitrite observed in the 2-day HRT effluent (Figure 6) indicates incomplete nitrification of ammonia for this short retention time.

Removal of ammonium and orthophosphate from the batch dairy wastewater was 96% and >99% respectively by Day 15 (Table 6). For the 25% dilution experiment, initial concentrations of total ammonia nitrogen (NH<sub>x</sub>-N) were 30 mg/L and were reduced to <5 mg/L in 6 days (Figure 7). The initial orthophosphate phosphorus concentration of 2.6 mg/L was reduced to 0.6 mg/L in 9 days and completely removed by Day 12. Nitrate concentrations were consistently below 0.3 mg/L for both conditions, and final nitrate concentrations were below the detection limit of 0.02 mg/L NO<sub>3</sub><sup>-</sup>-N. Similar results were

observed with the 10% dairy wastewater dilution. Nitrite showed a slight increase at Day 6 up to 0.5 mg/L  $\text{NO}_2^-$ -N, indicating some nitrification. Similar or higher ammonium removal efficiencies were observed by other researchers for algae-based treatment (Table 7).

## **Conclusions**

This research provided a proof-of-concept for a wastewater treatment process that combines nutrient removal and algal lipid production for potential use as a biofuel feedstock.  $\text{CO}_2$  supplementation was used to accelerate treatment and growth in both outdoor and indoor mixed-species cultures. Ammonium and orthophosphate removals were nearly complete for both municipal wastewater and diluted dairy wastewater. This study also contributed data on both the lipid content and lipid productivity of wastewater-grown algae, a rarely addressed topic. Lipid content ranged from 4.9%-29%, and lipid productivity reached 2.8 g/m<sup>2</sup>/d. While this lipid productivity is many times higher than that of terrestrial oil plants, higher productivity is a goal of continuing research. In addition, the suitability of the lipids for fuel production by transesterification and other means needs to be determined. Overall, the waste-to-biofuel approach of this study avoids many of the cost and food competition issues of other biofuel feedstocks while providing a valuable wastewater treatment service.

## **Acknowledgments**

Funding was provided by a US Environmental Protection Agency “People, Prosperity, and the Planet” grant, as well as a US Department of Energy Small Business Innovation Research grant to MicroBio Engineering. Lundquist was supported in part by the U.S. Office of Naval Research via the California Central Coast Research Partnership. The authors are grateful for consultation provided by Dr. John Benemann.

## References

An, J.Y., Sim, S.J., Lee, J.S., Kim, B. (2003). "Hydrocarbon production from secondary treated piggery wastewater by the green alga *Botryococcus braunii*." *Journal of Applied Phycology*, 15, 185-191.

APHA (2005). *Standard Methods for the Examination of Water and Wastewater*. American Public Health Association, American Water Works Association, and the Water Environment Federation.

Benemann, J., and Tillett, D. (1987). *Effects of Fluctuating Environments on the Selection of High Yielding Microalgae*. Final Report to the Solar Energy Research Institute, February 27, 1987.

Benemann, J.R., Koopman, B.L., Weissman, J.C., Eisenberg, D.M. and Goebel, R. (1980). "Development of Microalgae Harvesting and High Rate Pond Technologies in California." In *Algae Biomass: Production and Use*, G. Shelef and C.J. Soeder (editors), Elsevier North Holland Press, Amsterdam, 457-496.

Benemann, J., Goebel, P., Weissman, J., and Augenstein, D. (1982). *Microalgae as a Source of Liquid Fuels*. Final technical report. Office of Energy Research, US Department of Energy.

Benemann, J.R., Weissman, J.C., Eisenberg, D.M., Koopman, B.L., Goebel, R.P., Caskey, P.S., Thomson, R.D., and Oswald, W.J. (1978). *An Integrated System for the Conversion of Solar Energy with Sewage Grown Microalgae*. Final Report, US Department of Energy, Contract D(04-3)-34, 272.

Benemann, J.R., and Oswald, W.J. (1996). *Systems and Economic Analysis of Microalgae Ponds for Conversion of CO<sub>2</sub> to Biomass*. Final Report to the US Department of Energy Pittsburgh Energy Technology Center, Grant No. DE-FG22-03PC93204.

Bligh, E. and Dyer, W. (1959). "A rapid method for total lipid extraction and purification." *Canadian Journal of Biochemical Physiology*, 37, 911-917.

Weissman, J.C., Tillet, D., (1990). "Design and Operation of an Outdoor microalgae test facility: Large scale system results." In: *Aquatic Species Project Report FY 1989-90*, (Brown, L. M., and Sprague, S., ed.), NREL/TP-232-4174 DE92001207.

Craggs, R.J., Sukias, J.P., Tanner, C.T., and Davies-Colley, R.J. (2004). "Advanced pond system for dairy-farm effluent treatment." *New Zealand Journal of Agricultural Research*, 47, 449-460.

Chisti, Y. (2007). "Biodiesel from Microalgae." *Biotechnology Advances*, 25, 294-306.

Doucha, J., Straka, F., and Lívanský, K. (2005). "Utilization of flue gas for cultivation of microalgae (*Chlorella* sp.) in an outdoor open thin-layer photobioreactor." *Journal of Applied Phycology*, 17, 403-412.

Enssani, E. (1987). *Fundamental Parameters in Extraction of Lipids from Wastewater-grown Microalgal Biomass*. Ph.D. dissertation, Department of Civil Engineering, University of California, Berkeley, 194.

Fargione, J., Hill, J., Tilman, D., Polasky, S., Hawthorne, P. (2008). "Land clearing and the biofuel carbon debt." *Science*, 319, 1235-1238.

Golueke, C.G., Oswald, W.J., and Gotaas, H.B. (1957). "Anaerobic digestion of algae." *Applied Microbiology*, 5(1), 47-55.

Green, F.B., Lundquist, T.J., and Oswald, W.J. (1995). "Energetics of advanced integrated wastewater pond systems." *Water Science Technology*, 31(12), 9-20.

Gualtieri, P. and Barsanti, L. (2005). *Algae: Biochemistry, Physiology, Ecology, and Biotechnology*, CRC Press, 239.

Kebede-Westhead, E., Pizarro, C., and Mulbry, W. (2006). "Treatment of swine manure effluent using freshwater algae: production, nutrient recovery, and elemental composition of algal biomass at four effluent loading rates." *Journal of Applied Phycology*, 18(1), 41.

Laws, E. (1984). *Research and Development of Shallow Algal Mass Culture Systems for the Production of Oils*. Report for the Solar Energy Research Institute, Subcontract No. XK-3-03136.

Leman, J. (1997). "Oleaginous microorganisms: an assessment of the potential." *Advanced Applied Microbiology*, 43, 195-243.

Li-Cor (2008). *Principles of Radiation Measurement*. v1.0 - LI-COR (11/2008). Li-Cor, Inc., Lincoln, Nebraska, pp. 10.

Lincoln, E.P., Wilkie, A.C., and French, B.T. (1996). "Cyanobacterial process for renovating dairy wastewater." *Biomass and Bioenergy*, 10(1), 63-68.

Matinez, M.E., Sanchez, S., Jimenez, J.M. El Yousfi, F., and Munoz, L. (2000). "Nitrogen and phosphorus removal from urban wastewater by the microalga *Scenedesmus obliquus*." *Bioresource Technology*, 73, 263-272.

Metting, F.B. (1996). "Biodiversity and application of microalgae." *Journal of Industrial Microbiology*, 17, 477-489.

Mulbry, W., Kondrad, S., and Buyer, J. (2008). "Treatment of dairy and swine manure effluents using freshwater algae: fatty acid content and composition of algal biomass at

different manure loading rates.” *Journal of Applied Phycology*, DOI 10.1007/s10811-008-9314-8.

Oswald, W. J. (1960). “Fundamental factors in stabilization pond design.” *Proc. 3rd Conference Biological Waste Treatment*, Manhattan College, New York

Oswald, W.J. (2003). “My sixty years in applied algology.” *Journal of Applied Phycology*, 15, 99-106.

Oswald, W.J., Gotaas, H.B., Ludwig, H.F., and Lynch, V. (1953). “Algae symbiosis in oxidation ponds: photosynthetic oxygenation.” *Sewage and Industrial Wastes*, 25(6), 692-705.

Oswald, W.J. and C.G. Golueke (1960). “Biological transformation of solar energy.” In: *Advances in Applied Microbiology* (W.W. Umbreit, ed.), Vol. 2, Academic Press, New York, pp. 223-262.

Perlack, R.D., Wright, L.L., Turhollow, A.F., Graham, R.L., Stokes, B.J. and Erbach, D.C. (2005). *Biomass as Feedstock for a Bioenergy and Bioproducts Industry: The Technical Feasibility of a Billion-Ton Annual Supply*. DOE/GO-102005-2135, Oak Ridge National Laboratory, Oak Ridge, TN.

Presscott, G., Bamrick, J., Cawley, E., Jaques, W. (1978). *How to Know the Freshwater Algae*. W.C. Brown Co., Dubuque, Iowa, 304.

Roessler, P. (1990). "Environmental control of glycerolipid metabolism in microalgae: commercial implications and future research directions." *Journal of Phycology*, 26, 393-399.

Sheehan, J., Dunahay, T., Benemann, J., and Roessler, P. (1998). *A Look Back at the U.S. Department of Energy's Aquatic Species Program-Biodiesel from Algae*. National Renewable Energy Laboratory, Golden, Colorado.

Shifrin, N., and Chisholm, S. (1981). "Phytoplankton lipids: interspecific differences and effects of nitrate, silicate and light-dark cycles." *Journal of Phycology*, 17, 374-384.

Spoehr, H.A. and Milner, H.W. (1949). "The chemical composition of *Chlorella*: effect of environmental conditions." *Plant Physiology*, 24, 120.

Straka, F., Doucha, J., and Livansky, K. (2000). "Flue-gas CO<sub>2</sub> as a source of carbon in closed cycle with solar culture of microalgae." In Book of Abstracts, 4<sup>th</sup> *European Workshop on Biotechnology of Microalgae*, May 2000, Bergholz-Rehbrucke, Germany, 29-30.


Thompson, G.A. (1996). "Lipids and membrane function in green algae." *Biochemica et Biophysica*, 1306, 17-45.

Tsuzuki, M., Ohnuma, E., Sato, N., Takaku, T., and Kayguchi., A. (1990). "Effects of CO<sub>2</sub> concentration during growth on fatty acid composition in microalgae." *Plant Physiology*, 93, 851-856.


USDA (2005). *Agricultural Statistics 2005*. National Agricultural Statistics Service, United States Government Printing Office, Washington, D.C.

USDA (1992). *Agricultural Waste Management Field Handbook*, Chapter 4: Agricultural Waste Characteristics." United States Department of Agriculture, Soil Conservation Service.


Weissman, J.C., and Goebel, R.P. (1987). *Design and analysis of microalgal open pond systems for the purpose of producing fuels*. Subcontract report Solar Energy Research Institute, Golden, Colorado.

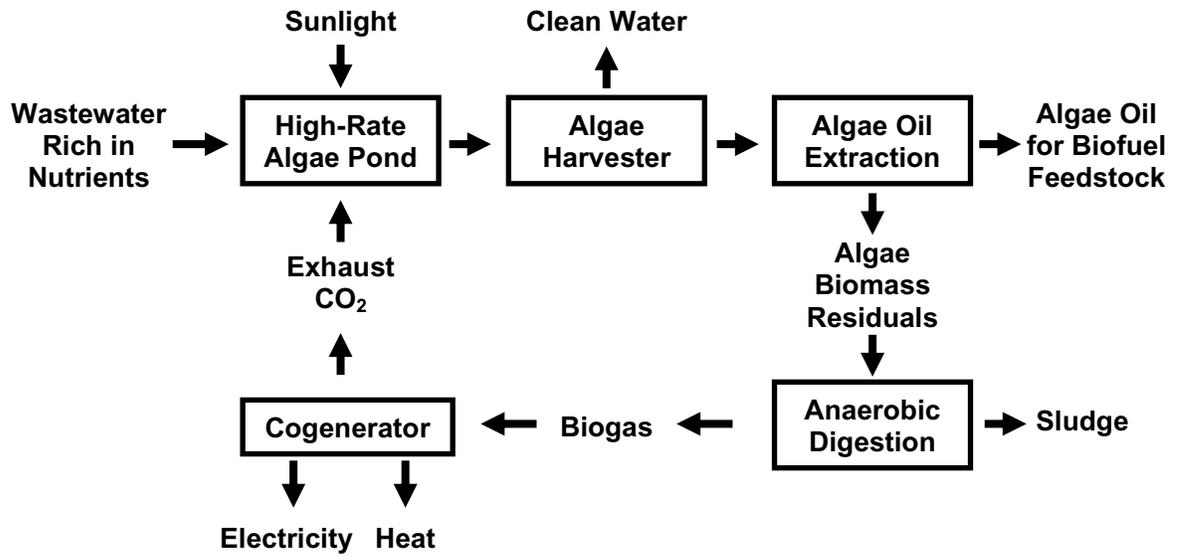


**Figure 1: Simplified process flow diagram envisioned for algae wastewater treatment and liquid biofuel production.**

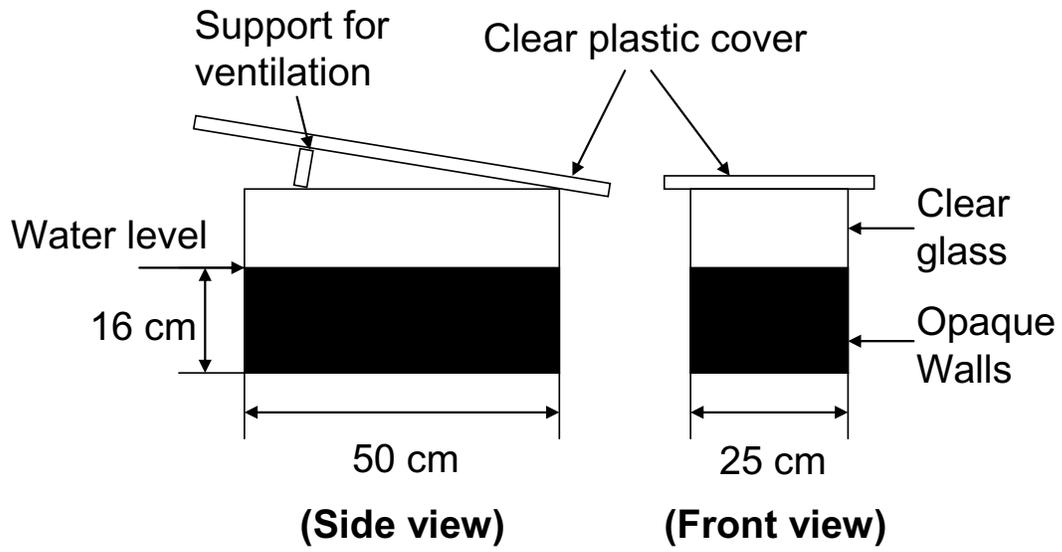


**Figure 2: Outdoor algae growth tanks for batch experiments with dairy wastewater.**

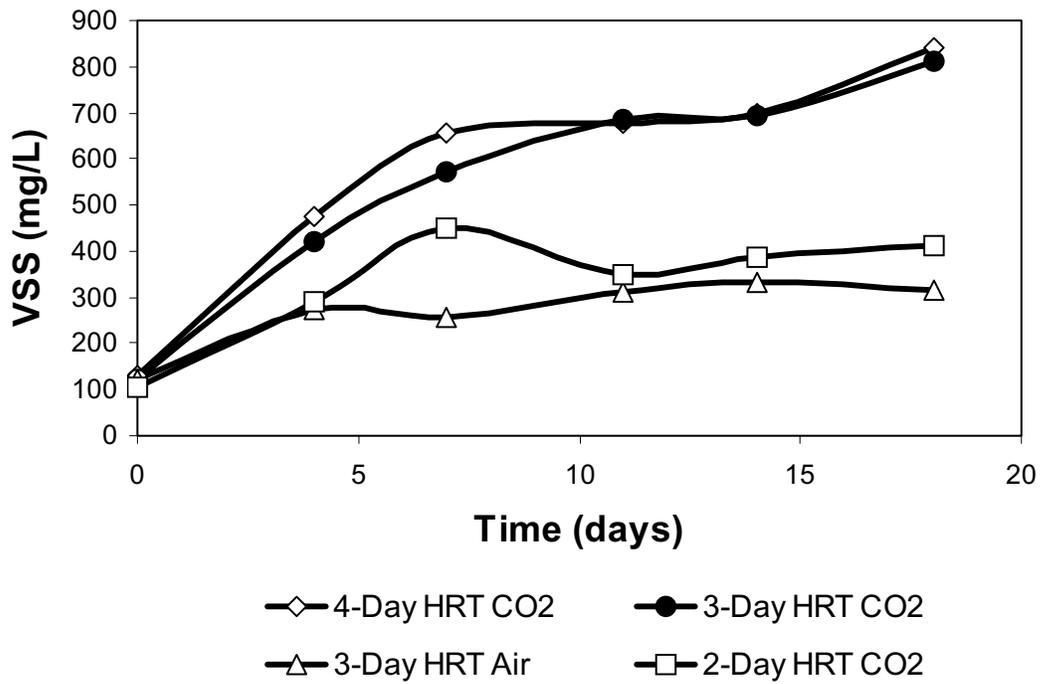



**Figure 3: Biomass concentrations during semi-continuous flow treatment of municipal wastewater (mean of duplicates).**

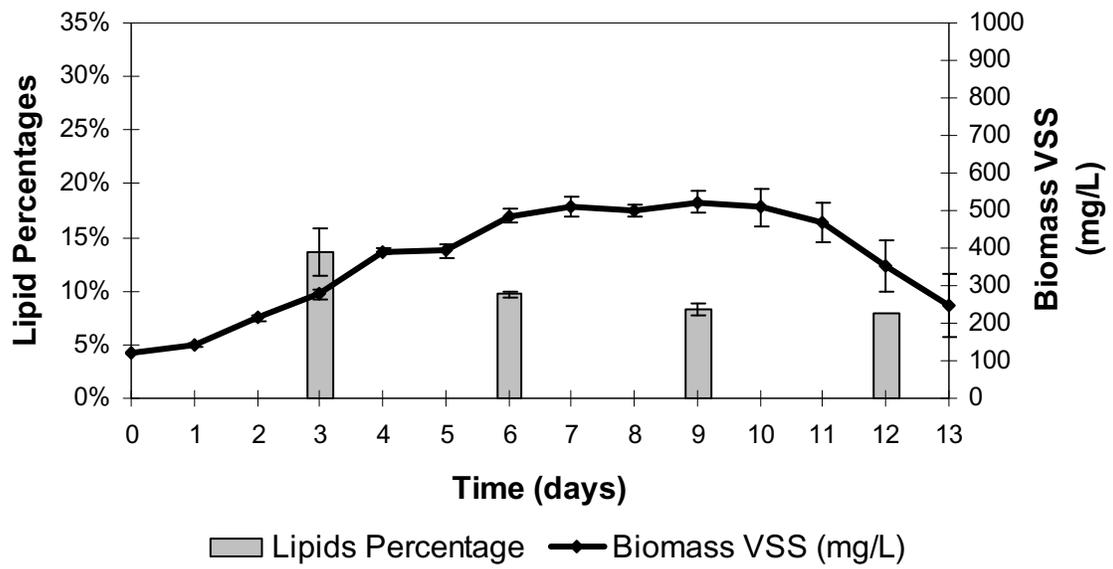


**Figure 4: Biomass concentration and cell lipid content during batch algae growth on 10% dairy wastewater (mean of triplicates).**

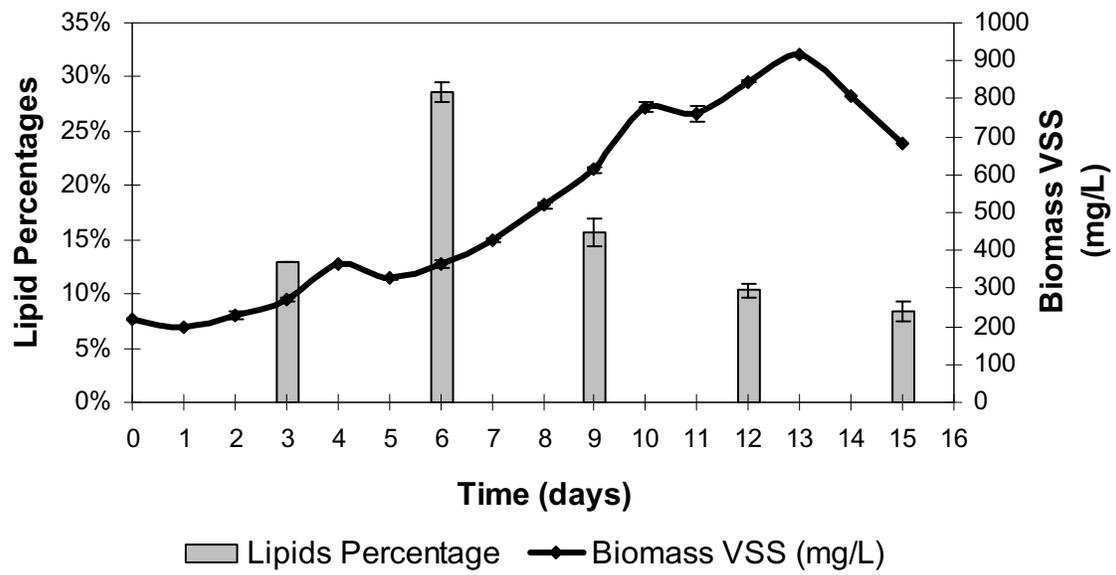

**Figure 5: Biomass concentration and cell lipid content during batch algae growth on 25% dairy wastewater (mean of triplicates).**

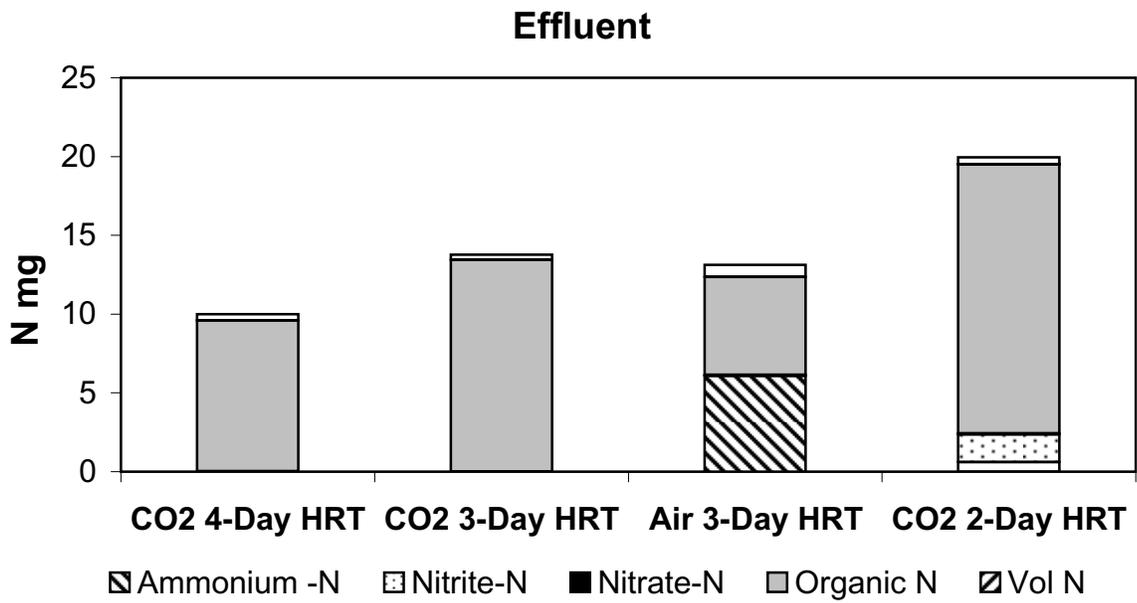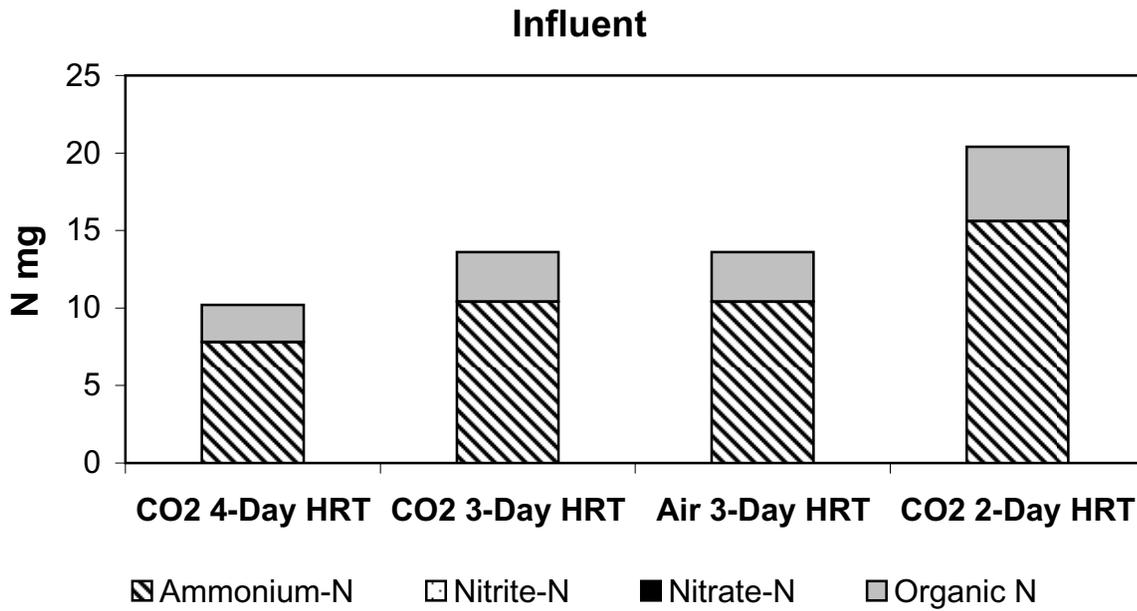

**Figure 6: Nitrogen balance for municipal wastewater cultures on Day 18 (means of duplicates). “Vol N” is volatilized nitrogen captured in a boric acid solution.**

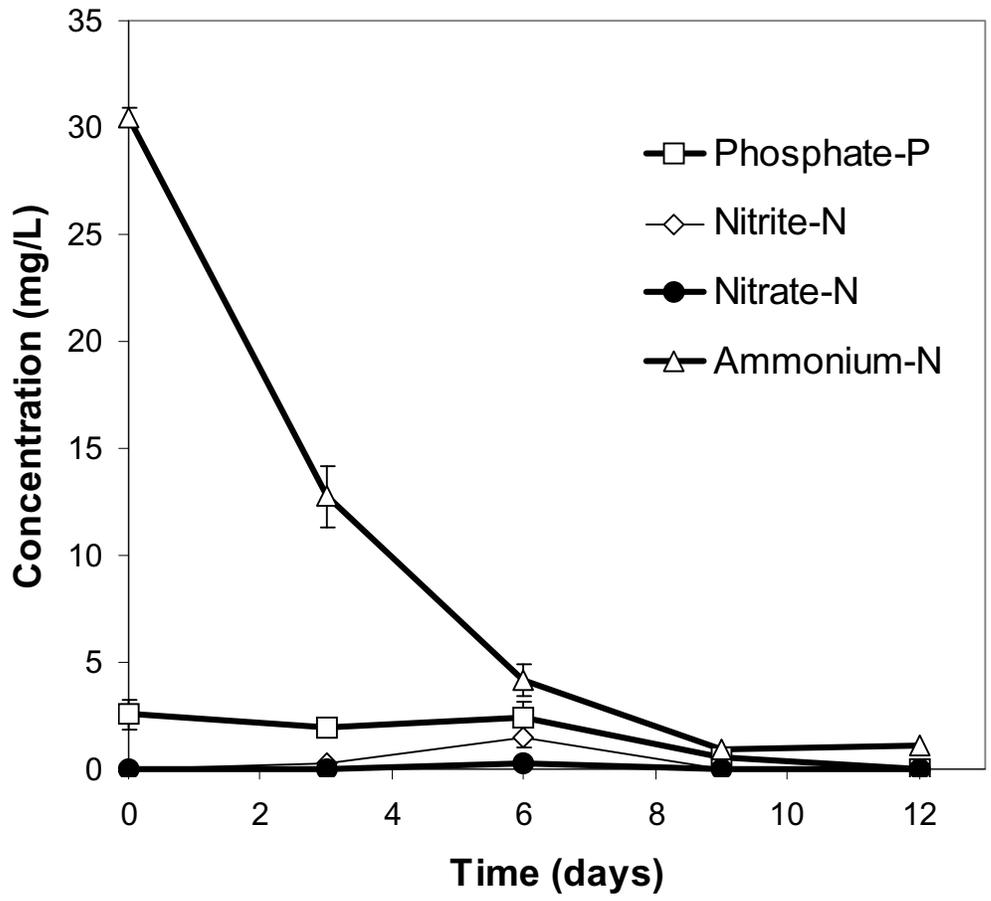

**Figure 7: Nutrient removal during batch culture (triplicates) on 25% dairy wastewater.**

**Table 1: Initial wastewater characteristics.**

<b>Wastewater characteristics</b>	<b>Dairy Wastewater</b>		<b>Municipal Wastewater</b>
	<b>25% Dilution</b>	<b>10% Dilution</b>	<b>No Dilution</b>
TSS (mg/L)	283	135	93
VSS (mg/L)	220	120	58
pH	7.9	7.7	7.2
Ammonium as N (mg/L)	30.5	16.3	39
Nitrate as N (mg/L)	< 0.01	0.05	< 0.01
Nitrite as N (mg/L)	< 0.01	0.04	< 0.01
Organic Nitrogen (mg/L)	50.7	20.2	12
TKN (mg/L)	81.0	36.5	51
Total Nitrogen (mg/L)	81.0	36.6	51
Phosphate as P (mg/L)	2.6	1.8	2.1

**Table 2: Culture conditions in dairy wastewater experiment.**

Day	Insolation (W/m <sup>2</sup> )	Air Temperature (°C)			Water Temp at 3pm (°C)	Avg. pH*	
		Max	Min	Avg.		10 % Dairy wastewater	25 % Dairy wastewater
0					32	7.7	7.9
1	50	13.6	9.9	11.4	15	7.4	7.5
2	191	17.3	7.3	11.3	30	7.2	7.1
3	228	24	11.4	16.3	36	8.9	7.4
4	228	20.9	7.5	13.1	35	9.3	7.6
5	70	14.4	9.5	12	17	7.0	7.3
6	212	17.9	10.6	13.1	32	6.5	7.1
7	169	17.8	8.6	11.6	29	7.3	8.4
8	226	15.8	4.5	9.1	27	8.6	9.5
9	246	16.3	4.5	10.4	32	7.5	7.7
10	252	22.3	4.5	12.9	37	6.4	6.4
11	247	24.2	5.1	13	34	7.1	7.3
12	246	20.9	5	11.4	36	8.3	8.0
13	242	22.1	7.9	13.4	37		7.3
14	239	20.8	7.4	13.2			
15	246	24.1	7.8	13.5			

\* Standard deviation of replicates ranged from 0.0 to 0.5

**Table 3: Lipid productivity of municipal wastewater cultures.**

<b>Sample</b>	<b>VSS (mg/L)</b>	<b>Lipids %</b>	<b>Lipid content of culture medium (mg/L)</b>	<b>Lipid Productivity (mg/L/day)</b>
<b>CO<sub>2</sub> 4-Day HRT</b>	843	4.9%	41.5	10.4
<b>CO<sub>2</sub> 3-Day HRT</b>	812	9.0%	73.3	24.4
<b>AIR 3-Day HRT</b>	317	9.3%	29.2	9.7
<b>CO<sub>2</sub> 2-Day HRT</b>	412	11.3%	46.2	23.1

**Table 4: Comparison of the lipid productivity of dairy wastewater cultures to that reported by others.**

<b>Study</b>	<b>Lipid productivity (g/m<sup>2</sup>/d)</b>	<b>Algal Species</b>	<b>Growth vessel</b>	<b>Medium</b>
Laws (1984)	7.9	<i>Platymonas sp.</i>	Air lift flume	Sea water
Thomas (1984)	4.5	<i>Tetraselmis suecica</i>	Indoor reactor	Nutrient enriched seawater
Brown (1990)	4	<i>Cylcotella cryptica</i>	Open pond	Si deficient media
<b>This study</b>	2.8	Polyculture	Open reactor	Anaerobic treated dairy wastewater

**Table 5: Nutrient removal by municipal wastewater cultures.**

	<b>Total Ammonia Nitrogen (mg/L)</b>		
	<b>Influent</b>	<b>Effluent*</b>	<b>% Removal</b>
<b>CO<sub>2</sub> 4-Day HRT</b>	39.0	<0.02	>99%
<b>CO<sub>2</sub> 3-Day HRT</b>	39.0	<0.02	>99%
<b>Air 3-Day HRT</b>	39.0	6.1 (± 0.89)	84%
<b>CO<sub>2</sub> 2-Day HRT</b>	39.0	0.6 (± 0.57)	98%

	<b>Phosphate as P (mg/L)</b>		
	<b>Influent</b>	<b>Effluent*</b>	<b>% Removal</b>
<b>CO<sub>2</sub> 4-Day HRT</b>	2.1	<0.02	>99%
<b>CO<sub>2</sub> 3-Day HRT</b>	2.1	<0.02	>99%
<b>Air 3-Day HRT</b>	2.1	<0.02	>99%
<b>CO<sub>2</sub> 2-Day HRT</b>	2.1	0.15 (± 0.15)	93%

\* Mean of duplicate reactors with standard deviation shown in parentheses.

**Table 6: Nutrient removal in dairy wastewater experiment at Day 15.**

	<b>Total Ammonia Nitrogen (mg/L)*</b>		
	<b>Influent</b>	<b>Effluent</b>	<b>% Removal</b>
<b>25% Dilution</b>	30.5 ( $\pm$ 0.4)	1.1 ( $\pm$ 0.1)	96%
<b>10% Dilution</b>	16.3 ( $\pm$ 4.8)	0.6 ( $\pm$ 0.1)	96%

	<b>Phosphate as P (mg/L)*</b>		
	<b>Influent</b>	<b>Effluent</b>	<b>% Removal</b>
<b>25% Dilution</b>	2.6 ( $\pm$ 0.7)	<0.02	>99%
<b>10% Dilution</b>	1.8 ( $\pm$ 0.01)	<0.02	>99%

\* Average of triplicate reactors (standard deviation, n = 3)

**Table 7: Comparison of total ammonia nitrogen removal to that reported for other algae treatment systems.**

<b>Study</b>	<b>% Total Ammonia-N Removal</b>	<b>Algae Species</b>	<b>Medium</b>
Martinez et al. (2000)	80-99	<i>Scenedemus obliques</i>	Autoclaved municipal wastewater
Lincoln et al. (1996)	99	<i>Arthrouspira plantensis</i>	Anaerobically treated dairy wastewater
Green et al. (1995)	99	Polyculture	Municipal wastewater
<b>This study</b>	99	Polyculture	Municipal wastewater
<b>This study</b>	96	Polyculture	Anaerobically treated dairy wastewater