



**Eleventh U.S. National Conference on Earthquake Engineering**  
*Integrating Science, Engineering & Policy*  
June 25-29, 2018  
Los Angeles, California

# SEISMIC PERFORMANCE OF SLENDER C-SHAPED WALLS SUBJECTED TO UNI- AND BI-DIRECTIONAL LOADING

A. Behrouzi<sup>1</sup>, A. Mock<sup>2</sup>, D. Lehman<sup>3</sup>, L. Lowes<sup>3</sup>, and D. Kuchma<sup>4</sup>

## ABSTRACT

Reinforced concrete structural walls are common as the primary lateral load resisting system in modern mid- and high-rise buildings constructed in seismic regions, yet few research programs have investigated the seismic performance of modern, slender walls with nonplanar cross-sectional geometries. Three large-scale, C-shaped wall specimens, designed per ACI 318-08, were tested under uni- and bi-directional loading at the University of Illinois at Urbana-Champaign (UIUC). This paper presents experimental results including the cyclic load-deformation response and measured versus nominal flexural/shear strengths as well as a description of damage sequence. Final failure occurs due to a flexure-tension failure of boundary elements where multiple previously buckled bars fracture. From these tests, it is possible to conclude that with respect to uni- versus bi-directionally loading C-shaped walls have similar strong-axis load-deformation response until 0.75% drift as well as effective flexure/shear stiffness; however, there is a notable reduction in strong-axis ductility due to bi-directional loading. When comparing C-shaped walls to planar walls, the C-shaped specimens exhibit a more ductile flexural-tension controlled response where wall flanges contribute significantly to carrying compressive loads. Additionally, wall flanges and boundary elements are noted to be critical to resisting shear demands after the lightly-reinforced wall web has deteriorated.

---

<sup>1</sup>Assistant Professor, Dept. of Architectural Engineering, California Polytechnic State University – San Luis Obispo, San Luis Obispo, CA 93407 (email: behrouzi@calpoly.edu)

<sup>2</sup>Structural Engineer, Stantec Architecture, Plano, TX 75024 (email: Andrew.Mock@stantec.com)

<sup>3</sup>Professor, Dept. of Civil & Environmental Engineering, University of Washington, Seattle, WA 98195

<sup>4</sup>Professor, Dept. of Civil & Environmental Engineering, Tufts University, Medford, MA 02155

# Seismic Performance of Slender C-shaped Walls Subjected to Uni- and Bi-directional Loading

A. Behrouzi<sup>1</sup>, A. Mock<sup>2</sup>, D. Lehman<sup>3</sup>, L. Lowes<sup>3</sup>, and D. Kuchma<sup>4</sup>

## ABSTRACT

Reinforced concrete structural walls are common as the primary lateral load resisting system in modern mid- and high-rise buildings constructed in seismic regions, yet few research programs have investigated the seismic performance of modern, slender walls with nonplanar cross-sectional geometries. Three large-scale, C-shaped wall specimens, designed per ACI 318-08, were tested under uni- and bi-directional loading at the University of Illinois at Urbana-Champaign (UIUC). This paper presents experimental results including the cyclic load-deformation response and measured versus nominal flexural/shear strengths as well as a description of damage sequence. Final failure occurs due to a flexure-tension failure of boundary elements where multiple previously buckled bars fracture. From these tests, it is possible to conclude that with respect to uni- versus bi-directionally loading C-shaped walls have similar strong-axis load-deformation response until 0.75% drift as well as effective flexure/shear stiffness; however, there is a notable reduction in strong-axis ductility due to bi-directional loading. When comparing C-shaped walls to planar walls, the C-shaped specimens exhibit a more ductile flexural-tension controlled response where wall flanges contribute significantly to carrying compressive loads. Additionally, wall flanges and boundary elements are noted to be critical to resisting shear demands after the lightly-reinforced wall web has deteriorated.

## Introduction

Reinforced concrete structural walls are common as the primary lateral load resisting system in modern mid- and high-rise buildings constructed in seismic regions. Flexurally-dominated walls are relatively stiff under service-level loading and are generally understood to exhibit a ductile behavior under severe earthquake loading. Though there is a heavy reliance on structural concrete walls by practicing engineers, few research programs have investigated the seismic performance of modern walls with nonplanar cross-sectional geometries. This deficiency inhibits the development of reliable performance-based earthquake engineering (PBEE) tools for structural walls. This paper summarizes a large-scale experimental test program conducted at the UIUC Network for Earthquake Engineering Simulation (NEES) lab focusing on slender walls with a C-shaped configuration frequently found in coupled-core systems.

---

<sup>1</sup>Assistant Professor, Dept. of Architectural Engineering, California Polytechnic State University – San Luis Obispo, San Luis Obispo, CA 93407 (email: behrouzi@calpoly.edu)


<sup>2</sup>Structural Engineer, Stantec Architecture, Plano, TX 75024 (email: Andrew.Mock@stantec.com)

<sup>3</sup>Professor, Dept. of Civil & Environmental Engineering, University of Washington, Seattle, WA 98195

<sup>4</sup>Professor, Dept. of Civil & Environmental Engineering, Tufts University, Medford, MA 02155

## Description of Experiment

The three, nominally identical C-shaped wall specimens (CW1-3) were designed per ACI 318-08. These 1:3 scale walls simulate the bottom three floors of a ten-story prototype wall, resulting in a story height of 1.2 m (4 ft.), wall length of 3.0 m (10 ft.), flange length of 1.2 m (4 ft.), and wall thickness of 15 cm (6 in.). Fig. 1 shows the geometry and reinforcing for the walls; concrete strengths range 34.04-36.22 MPa (4937-5254 psi) and Grade 60 ASTM 706 steel was used.

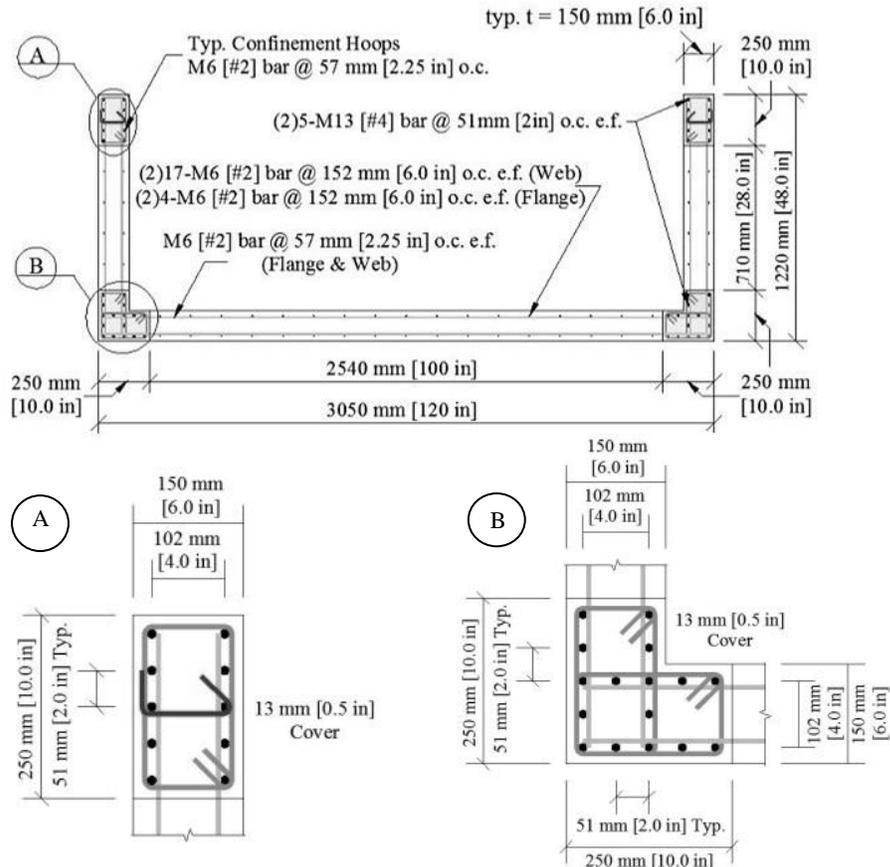


**Figure 1.** C-shaped wall specimens: geometry and reinforcing details.

The primary test parameter was loading direction: strong axis (CW1), strong + weak axis (CW2), strong + weak axis AND simulated coupling (CW3). In addition to cyclic displacement, walls were subject to overturning moment and axial load (typ.  $0.05f_c'A_g$ ) to account for the upper seven stories not physically modelled. Test specimens were monitored with a dense, high-resolution sensor array; details about test setup, loading protocol, and instrumentation are in [1].

## Experimental Results

Comprehensive datasets and support documentation for the C-shaped wall tests is available on the “Design Safe-CI” repository [2, 3, 4]; also, detailed discussion of wall response is in [1]. Fig. 2 shows the normalized base moment (ratio of measured base moment to calculated nominal moment,  $M_b/M_n$ ) versus drift at the top of the wall for each wall. For bi-directionally

loaded walls (CW2-3), plots include strong and weak-axis response. Note that for CW3, the weak-axis nominal moment,  $M_n$ , varies throughout the test due to the simulated coupling-action where the physical specimen is treated as the tension or compression pier and subject to variable axial load. Table 1 lists shear and moment demand versus capacities for each wall.

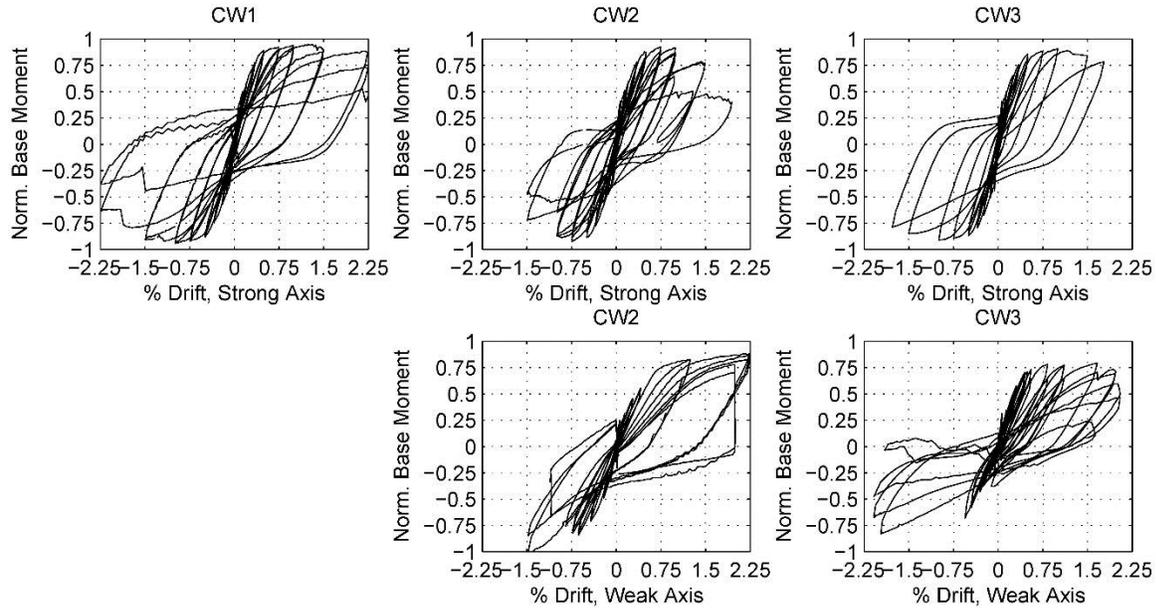

**Figure 2.** Normalized base moment versus third-story drift in strong and weak-axis directions.

**Table 1.** C-Shaped wall demands and capacities.


Loading Direction	Wall ID	ACI shear strength, $V_n$ (MPa)	Max shear demand, $V_{max}$ (MPa)	$V_{max}/V_n$	Nominal flex. strength, $M_n$ (kN m)	Max moment demand at base, $M_{base}$ (kN m)	$M_{base}/M_n$
Strong Axis	CW1	$0.48\sqrt{f'_c}A_g$	$0.21\sqrt{f'_c}A_g$	0.44	8,696	8,243	0.95
	CW2	$0.47\sqrt{f'_c}A_g$	$0.20\sqrt{f'_c}A_g$	0.42	8,712	8,066	0.93
	CW3	$0.47\sqrt{f'_c}A_g$	$0.20\sqrt{f'_c}A_g$	0.41	8,706	7,933	0.91
Weak axis, toe in tension	CW2	$0.41\sqrt{f'_c}A_g$	$0.05\sqrt{f'_c}A_g$	0.13	2,350	2,068	0.88
	CW3	$0.42\sqrt{f'_c}A_g$	$0.16\sqrt{f'_c}A_g$	0.38	2,777 <sup>A</sup>	2,187 <sup>A</sup>	0.79 <sup>A</sup>
Weak axis, toe in comp.	CW2	$0.41\sqrt{f'_c}A_g$	$0.09\sqrt{f'_c}A_g$	0.21	3,441	3,456	1.0
	CW3	$0.42\sqrt{f'_c}A_g$	$0.11\sqrt{f'_c}A_g$	0.27	2,328 <sup>B</sup>	1,944 <sup>B</sup>	0.84 <sup>B</sup>

<sup>A</sup> Axial load = 3,318 kN compression

<sup>B</sup> Axial load = 507 kN tension

All three C-Shaped walls have a similar damage sequence with nearly identical strong-axis response to nominal flexure strength. However, bi-directional loading resulted in substantial differences in the drift demands at the onset of the damage limit states as well as a significant reduction in stiffness during post-yield displacement cycles. Fig. 3 indicates typical damage/cracking pattern of wall specimens at 1.5% drift. The damage mechanism of the walls is generally characterized by spalling and crushing of concrete along the wall-foundation interface

due to sliding, loss of confinement in the boundary elements, and crushing of core concrete and severe buckling of longitudinal bars. Ultimately, the C-Shaped walls experience significant strength loss due to fracture of previously buckled boundary element bars, and thus can be characterized as having a buckling-rupture failure mechanisms. Further details available in [1].

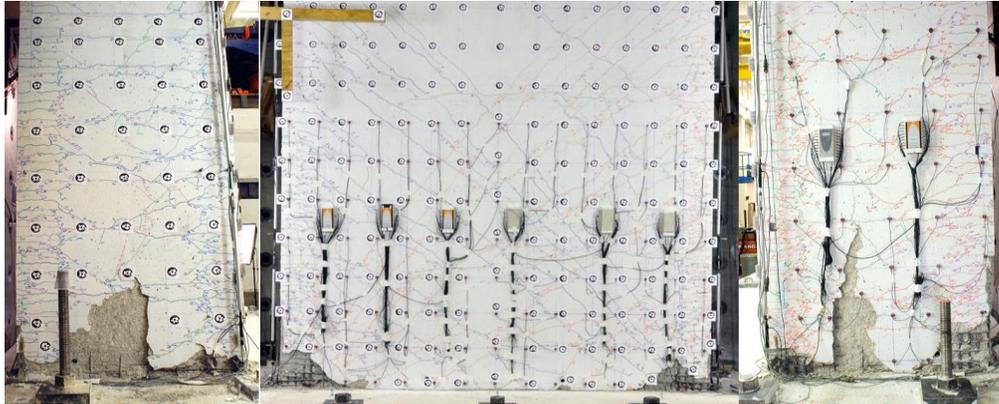

**Figure 3.** Damage to specimen CW2 at 1.5% X-drift.

### Conclusions

From these tests, it is possible to conclude that with respect to uni- versus bi-directional loading C-shaped walls have similar strong-axis load-deformation response until 0.75% drift as well as effective flexure/shear stiffness; however, there is a notable reduction in strong-axis ductility due to bi-directional loading. When comparing C-shaped walls to planar walls, the C-shaped specimens exhibit a more ductile flexural-tension controlled response where wall flanges contribute significantly to carrying compressive loads. Additionally, wall flanges and boundary elements are noted to be critical to resisting shear demands after the lightly-reinforced wall web has deteriorated.

### Acknowledgments

Support for C-shaped wall tests was provided by the Charles Pankow Foundation (RGA #03-09) and the National Science Foundation (CMS-042157 and CMMI-0927178). Any opinions, findings, and conclusions or recommendations expressed in this paper are those of the authors and do not necessarily reflect the views of the aforementioned sponsors.

### References

1. Lowes LN, Lehman DE, Kuchma DA, Behrouzi AA, Mock AW (2015). Summary of large scale c-shaped reinforced concrete wall tests. Report to the Charles Pankow Foundation on Grant.
2. Birely A, Mock AW, Behrouzi AA, Kuchma DA, Lehman DE, Lowes LN (2014). "Seismic Behavior of Modern Reinforced Concrete C-Shaped Walls (Specimen UW6)", Design-Safe CI (distributor), Dataset, DOI:10.4231/D3C24QP0D
3. Behrouzi AA, Mock AW, Birely A, Kuchma DA, Lehman DE, Lowes LN (2014). "Seismic Behavior of Modern Reinforced Concrete C-Shaped Walls (Specimen UW7)", Design-Safe CI (distributor), Dataset, DOI:10.4231/D37D2Q79C
4. Mock AW, Behrouzi AA, Birely A, Kuchma DA, Lehman DE, Lowes LN (2014). "Seismic Behavior of Modern Reinforced Concrete C-Shaped Walls (Specimen UW8)", Design-Safe CI (distributor), Dataset, DOI:10.4231/D33N20F5M